
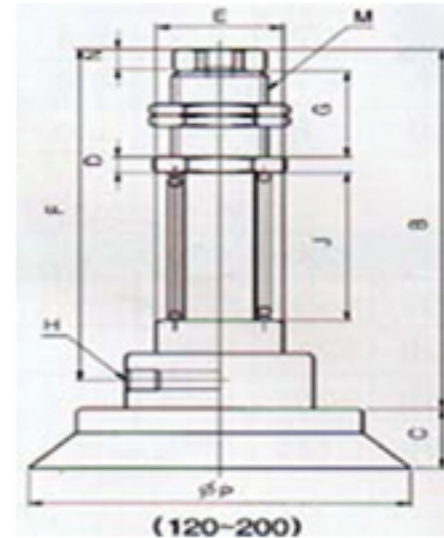
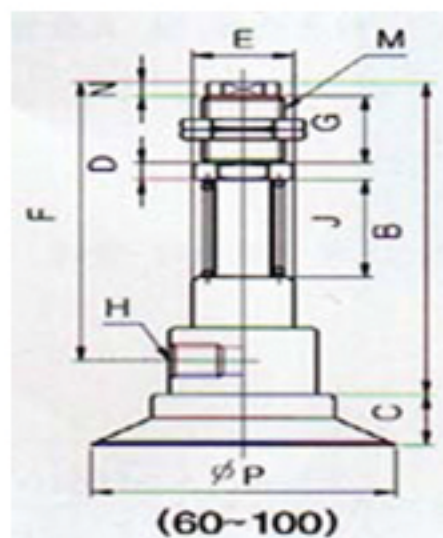


Vacuum Pad(P Y S-Series)

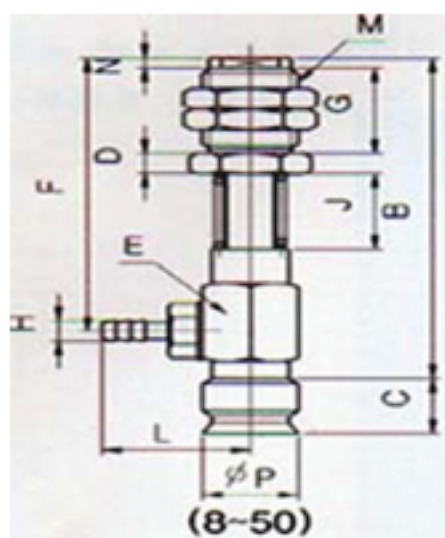

Product Features

Attract the objects by vacuum pressure.

Materials of pad are black rubber or silicon rubber, urethan rubber according to the objects.

Dimension (Horizontal Spring Type)

Type	ST	B	D	E	F	G	H	J	L	M	N	φP	C
PYS10-(M10)	10	51	2	9H	44	13	2.6	15	21	M10 X 1.25	2	8	7.5
	20	69	2	9H	62	13	2.6	33	21	M10 X 1.25	2	10	8
	30	91	2	9H	84	13	2.6	55	21	M10 X 1.25	2	10	8
PYS15-(M12)	10	55	3	9H	48	13	2.6	16	21	M12 X 1.25	4	8	7.5
	15	61	3	9H	54	13	2.6	22	21	M12 X 1.25	4	10	8
	20	66	3	9H	59	13	2.6	27	21	M12 X 1.25	4	10	8
PYS20-(M12)	10	62	3	9H	51	13	5	16	21	M12 X 1.25	4	15	8
	20	75	3	9H	64	13	5	29	21	M12 X 1.25	4	20	11
	30	85	3	9H	74	13	5	39	21	M12 X 1.25	4	25	14
PYS25-(M14)	10	75	4	9H	64	18	5	23	21	M14 X 1.5	4	15	8
	20	86	4	9H	74	18	5	33	21	M14 X 1.5	4	20	11
	30	105	4	9H	94	18	5	53	21	M14 X 1.5	4	25	14
	65	140	4	9H	129	18	5	88	21	M14 X 1.5	4	25	14
PYS35-(M14)	10	73	4	11H	61	18	5	15	22	M14 X 1.5	4	30	14
	20	88	4	11H	76	18	5	30	22	M14 X 1.5	4	35	14
	30	98	4	11H	86	18	5	40	22	M14 X 1.5	4	40	14
	50	120	4	11H	109	18	5	63	22	M14 X 1.5	4	50	14
	65	165	5	11H	154	18	5	108	22	M14 X 1.5	4	50	14
PYS50-(M16)	10	91	5	11H	81	20	5	27	23	M16 X 1.5	4	30	14
	20	103	5	11H	91	20	5	37	23	M16 X 1.5	4	35	14
	30	125	5	11H	114	20	5	60	23	M16 X 1.5	4	40	14
	600	170	5	11H	159	20	5	105	23	M16 X 1.5	4	50	14
PYS80-(M16)	15	94	5	29	84	20	5	29	*	M16 X 1.5	5	60	15
	30	133	5	29	123	20	5	68	*	M16 X 1.5	5	80	20
	50	173	5	29	163	20	5	108	*	M16 X 1.5	5	80	20

Vacuum Pad(P Y S-Series)

	15	94	5	34	84	23	5	26	*	M18 X 1.5	5	100	22
PYS100-(M18)	30	133	5	34	123	23	5	65	*	M18 X 1.5	5	100	22
	50	173	5	34	163	23	5	105	*	M18 X 1.5	5	100	22
PYS80-(M22)	15	102	5	29	92	28	PT 1/8	27	*	M22 X 1.5	7	60	15
	30	122	5	29	112	28	PT 1/8	47	*	M22 X 1.5	7	80	20
	85	222	5	29	212	28	PT 1/8	147	*	M22 X 1.5	7	80	20
PYS100-(M24)	15	107	6	34	97	25	PT 1/8	34	*	M24 X 1.5	7	100	22
	30	132	6	34	122	25	PT 1/8	59	*	M24 X 1.5	7	100	22
	85	222	6	34	212	25	PT 1/8	149	*	M24 X 1.5	7	100	22
PYS120-(M26)	15	117	6	59	105	30	PT 1/8	34	*	M26 X 1.5	7	120	27
	30	147	6	59	135	30	PT 1/8	64	*	M26 X 1.5	7	150	43
	50	197	6	59	185	30	PT 1/8	114	*	M26 X 1.5	7	200	37
PYS150-(M30)	15	126	7	59	114	35	PT 1/8	35	*	M30 X 1.5	10	120	27
	45	170	7	59	158	35	PT 1/8	79	*	M30 X 1.5	10	150	43
	80	250	7	59	238	35	PT 1/8	159	*	M30 X 1.5	10	200	37
PYS200-(M30)	15	126	7	69	114	35	PT 1/8	35	*	M30 X 1.5	10	200	37
	45	170	7	69	158	35	PT 1/8	79	*	M30 X 1.5	10	200	37
	80	250	7	69	238	35	PT 1/8	159	*	M30 X 1.5	10	200	37